Coolgear, Inc.
5120 110th Ave N
Clearwater, FL 33760 USA

P: +1-727-209-1300
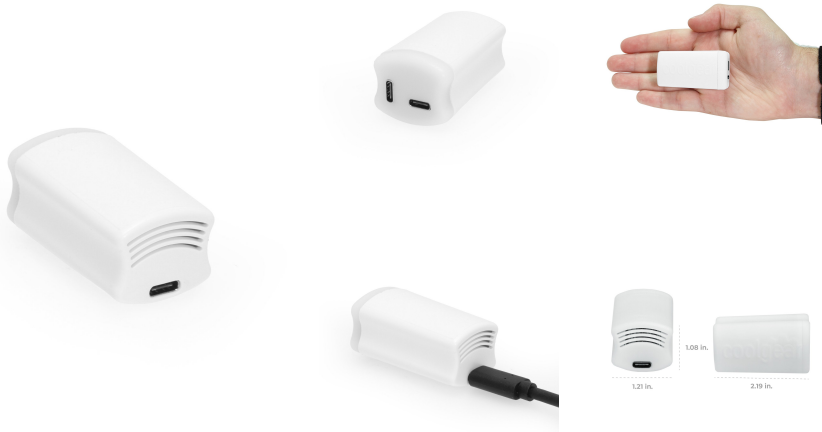**F:** +1-727-209-1302
coolgear.com

Technical Data Sheet Rev 06-241115

Compact 95W USB USB 3.2 Gen 2 Type-C PD Injector (DFP) w/ 10Gbps Speeds for Seamless Legacy Host to PD Device Connectivity

Model Number: **CG-DFP-INJPDC**

Features

- USB 3.2 Gen 2 Type-C to Type-C PD Injector is designed to add Type-C PD Power to DFP devices that require more than the standard USB 5V. Connect new USB Type-C devices to legacy host computers that don't have PD Power output.
- Downstream: Type-C port x 1 (supports PD power and data)
- Upstream: Type-C port x 1 (does not support PD)
- PD Type-C Power Supply: NOT Included (works with all makes and models of 60 watt+ Type-C PD adapters)
- * Notice: This product does NOT support USB-C DisplayPort (DP/Video Alt Mode) and is intended for data and power functionality only

Package Contents

- Adapter

Specifications

OVERVIEW	
Model No	CG-DFP-INJPDC
Product Type	USB Adapter
Compliance	None or N/A
UPC	045079164468
Country of Origin	China
LED indicators	None or N/A
Electrical Protections	N/A
PHYSICAL	
Ship Weight (lbs)	0.05 lbs
Ship Weight (kg)	0.02 kg
Item Weight	0.0375 lbs
Length	2.19 inches
Width	1.21 inches
Height	1.08 inches
Material	Plastic
Color	White
Mountable	N/A

Coolgear, Inc.
5120 110th Ave N
Clearwater, FL 33760 USA

P: +1-727-209-1300
F: +1-727-209-1302
coolgear.com

Specifications Cont.

CONNECTIONS

USB Specification	USB 3.2 Gen 2
Upstream Port Type	USB 3.2G2 / 3.0 Type-C Female
Maximum Data Rate	10 Gbps
Downstream Port Type	1x Type C USB 3.2 G2
Works as Standalone Charger	Y - Can be used without Host
Can be Bus Powered	N - External Power Required

POWER

Supported Charge Protocols	BC 1.2 | DCP

ENVIRONMENTAL

Operating Temperature	0C ~ 55C
Storage Temperature	-20C ~ 85C
Operating Humidity	5% to 95% RH

OS SUPPORT

WARRANTY

Warranty Period	1 Year

PRODUCT URL

Product Page	https://www.coolgear.com/product/compact-95w-usb-usb-3-2-gen-2-type-c-pd-injector-dfp-w-10gbps-speeds-for-seamless-legacy-host-to-pd-device-connectivity